

8

7

6

5

4

3

2


1

D


C

B


A

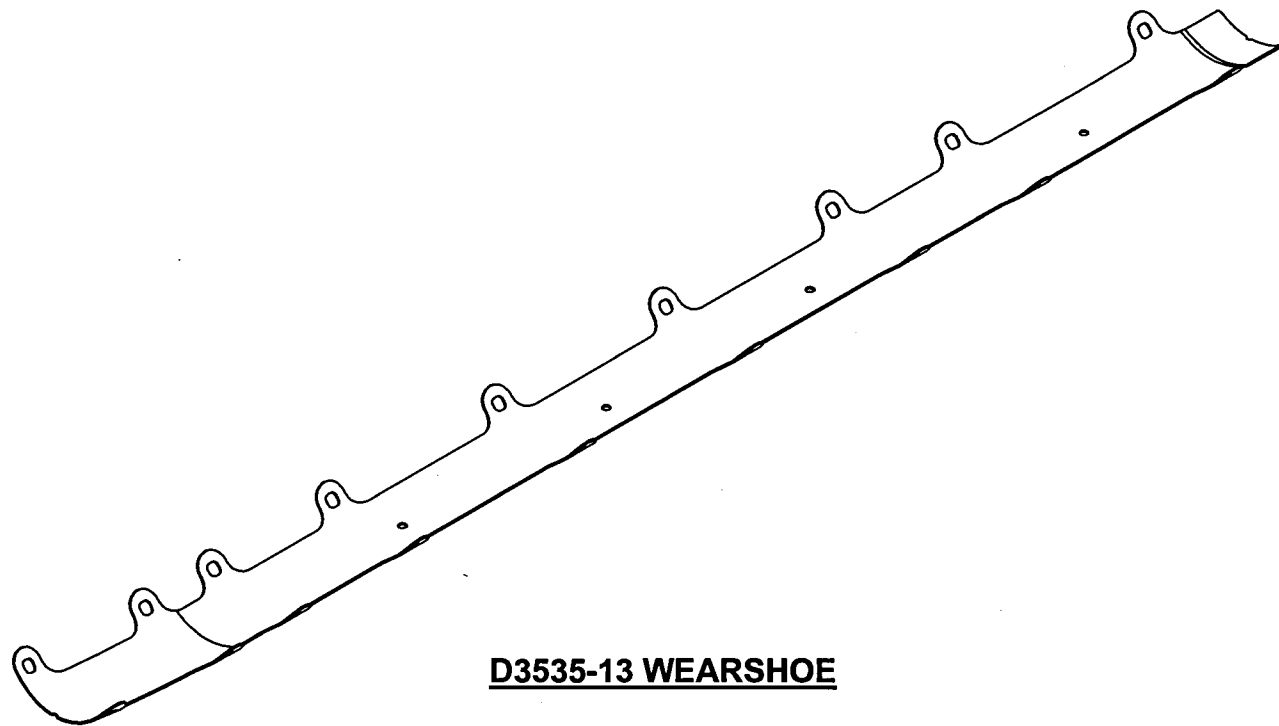

D3535-13 WEARSHOE

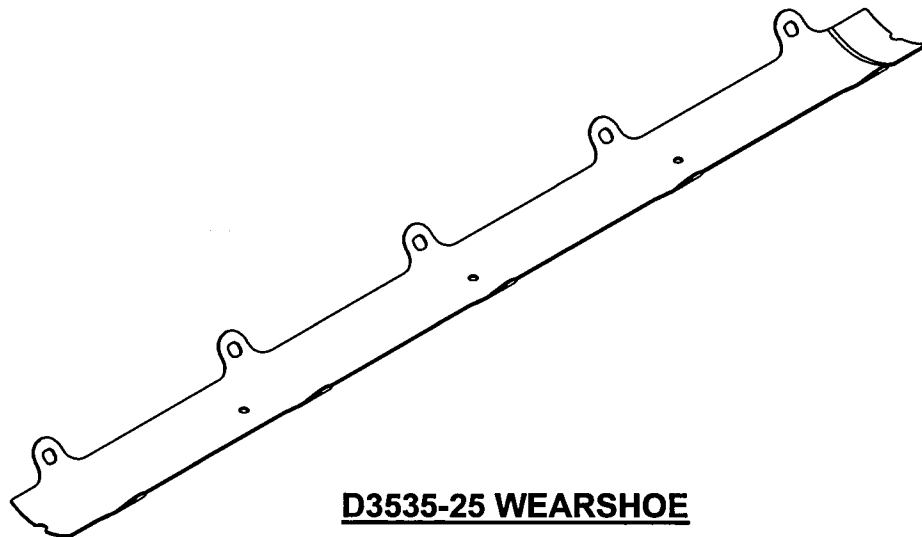

D3535-25 WEARSHOE

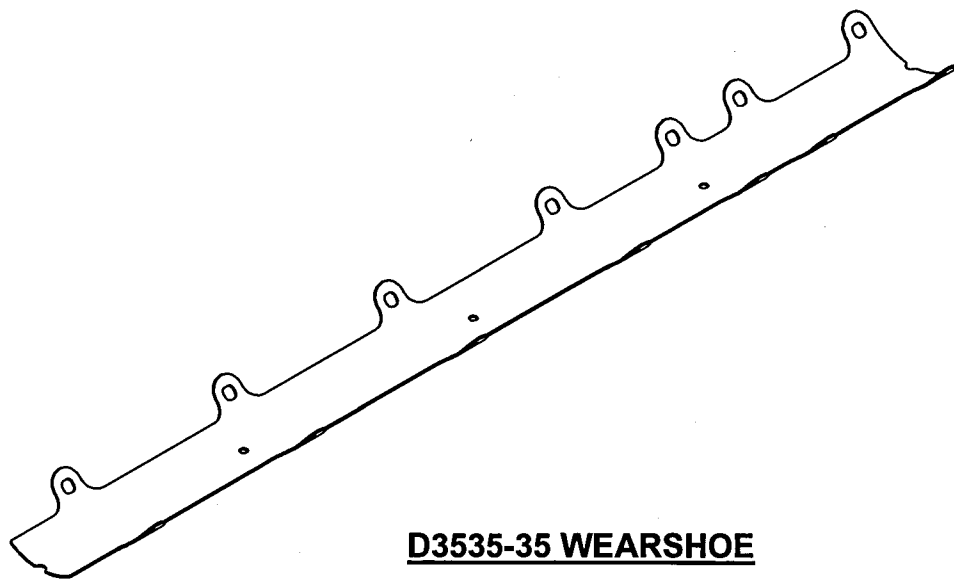


D3535-35 WEARSHOE

RELEASED


2018 OCT 19
ECN 18-030

APPROVED

C	REDRAWN IN SOLIDWORKS TO CURRENT STANDARDS. THE FOLLOWING COMPONENTS ARE OBSOLETE: D3535-11 REPLACED BY D4956-11, D3535-15 REPLACED BY D4956-15, D3535-21 REPLACED BY D4956-21, D3535-23 REPLACED BY D4956-23, D3535-31 REPLACED BY D4956-31, D3535-33 REPLACED BY D4956-33, D3535-37 REPLACED BY D4956-37, D3535-39 REPLACED BY D4956-39 AND D3535-41 REPLACED BY D4956-41.		ZF	18.05.11
B	MOVE TAB OUTBOARD, ADD AMS SPEC		CB	07.04.17
A	NEW ISSUE		CB	06.10.25
REV.	DESCRIPTION		BY	DATE
DESIGN	CB	DART AEROSPACE USA, INC. EUGENE, OR		
DRAWN	ZF			
CHECKED	MW	DRAWING NO. D3535		REV. C
MFG. APPR.	DD			SHEET 1 OF 5
APPROVED	NO	TITLE WEARSHOE		SCALE
DE APPR.	DS			NTS
DATE	18.05.11	COPYRIGHT © 2006 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.		

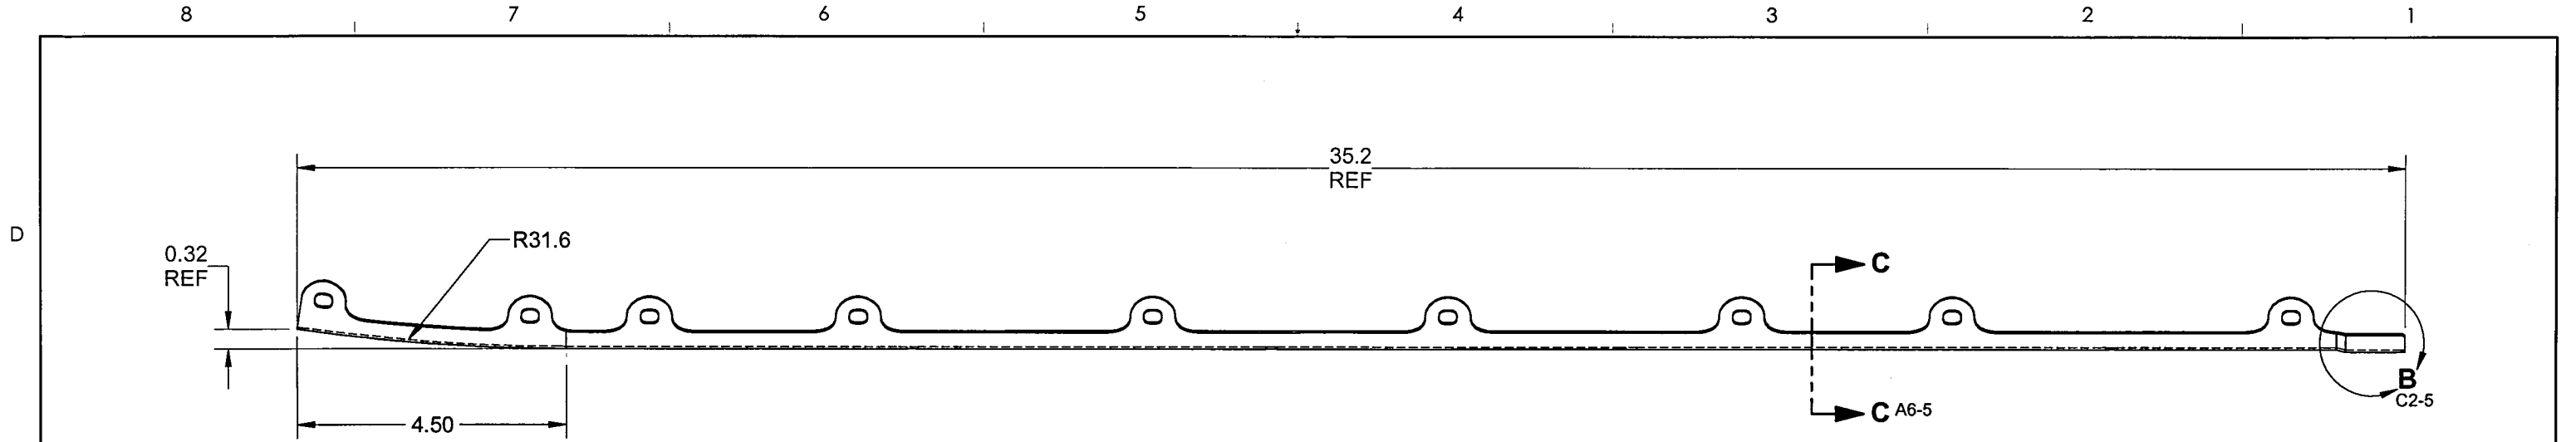

D3535-13 WEARSHOE
(MAKE FROM -13F)

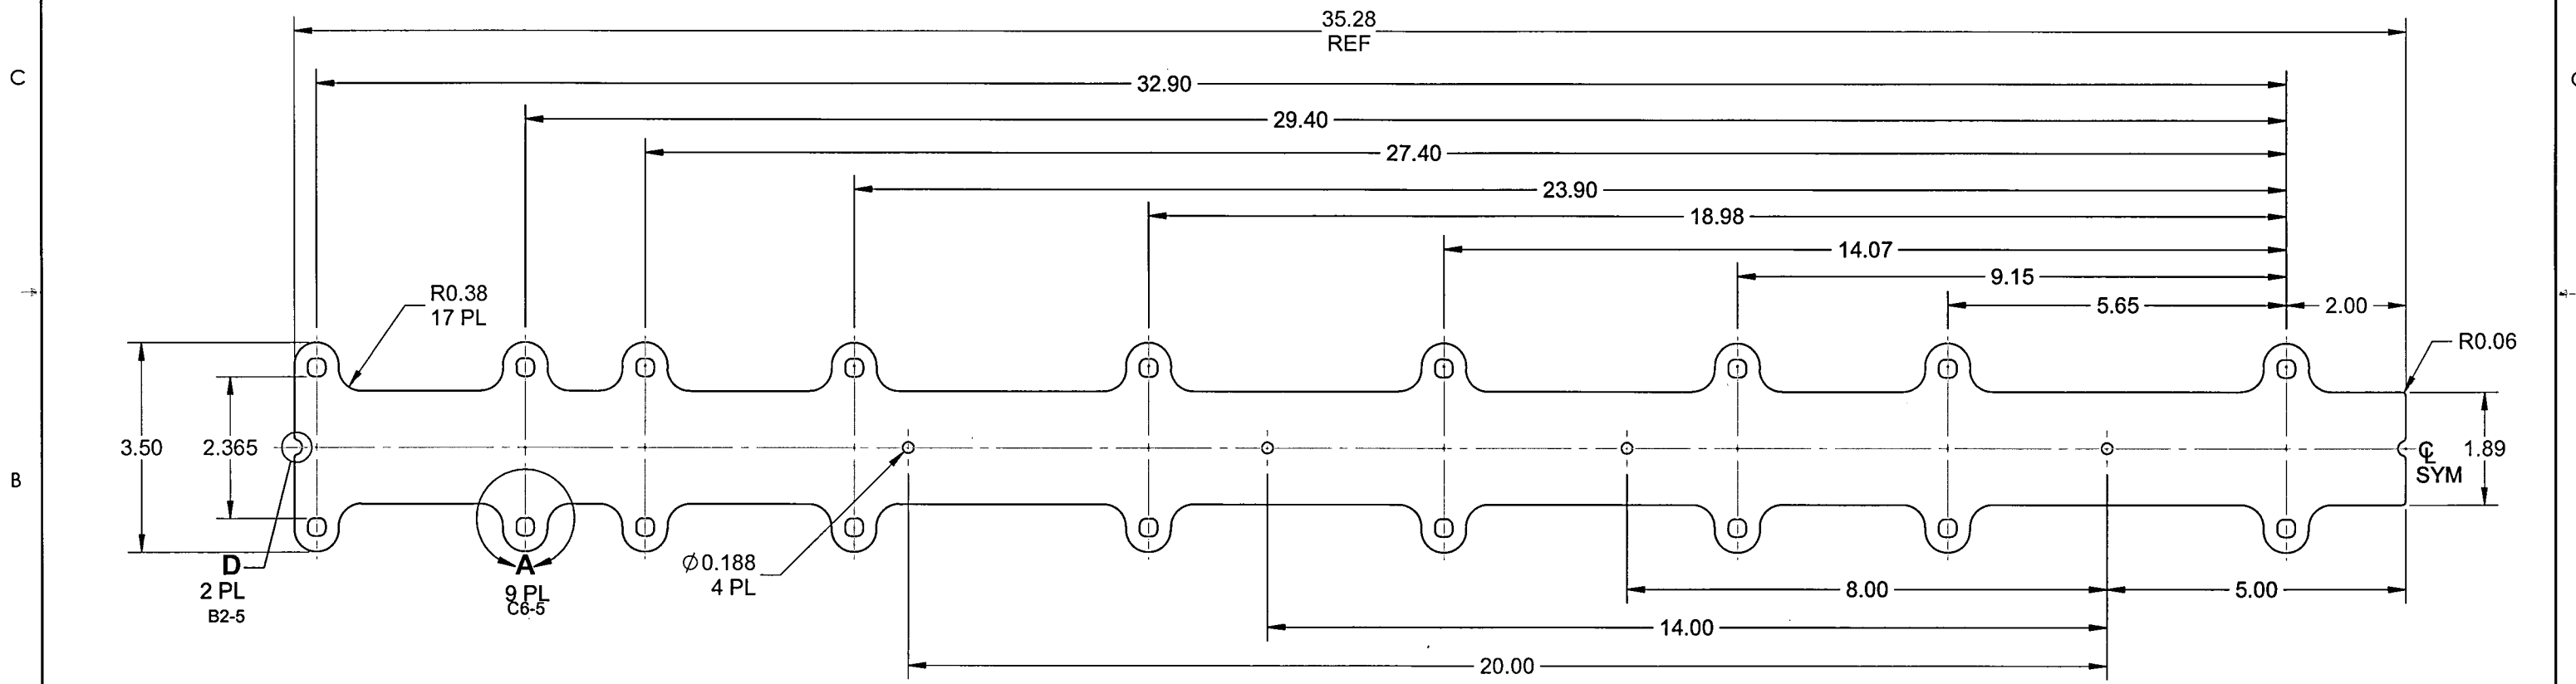


D3535-13F WEARSHOE
(FLAT PATTERN)

- NOTES:**
- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SHEET, 20 GAUGE (0.038 THK)
PER MIL-S-5059 OR AMS 5513 (304) AMS 5524 (316)
OR ASTM A240 OR ASME SA240
REF DART SPEC M304S20GA
 - 2) FINISH: POWDER COAT GREY SANDTEX (4.3.5.6) PER DART QSI 005 4.3
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY WITH DART P/N AND B/N PER DART QSI 044 6.1
 - 7) WEIGHT: 0.83 lbs

RELEASED
2019 OCT 19

APPROVED


DESIGN	CB	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	ZF		
CHECKED	MW	DRAWING NO.	REV. C
MFG. APPR.	DD	D3535	SHEET 2 OF 5
APPROVED	NO	TITLE	SCALE
DE APPR.	DS	WEARSHOE	NTS
DATE	18.05.11	<small>COPYRIGHT © 2006 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

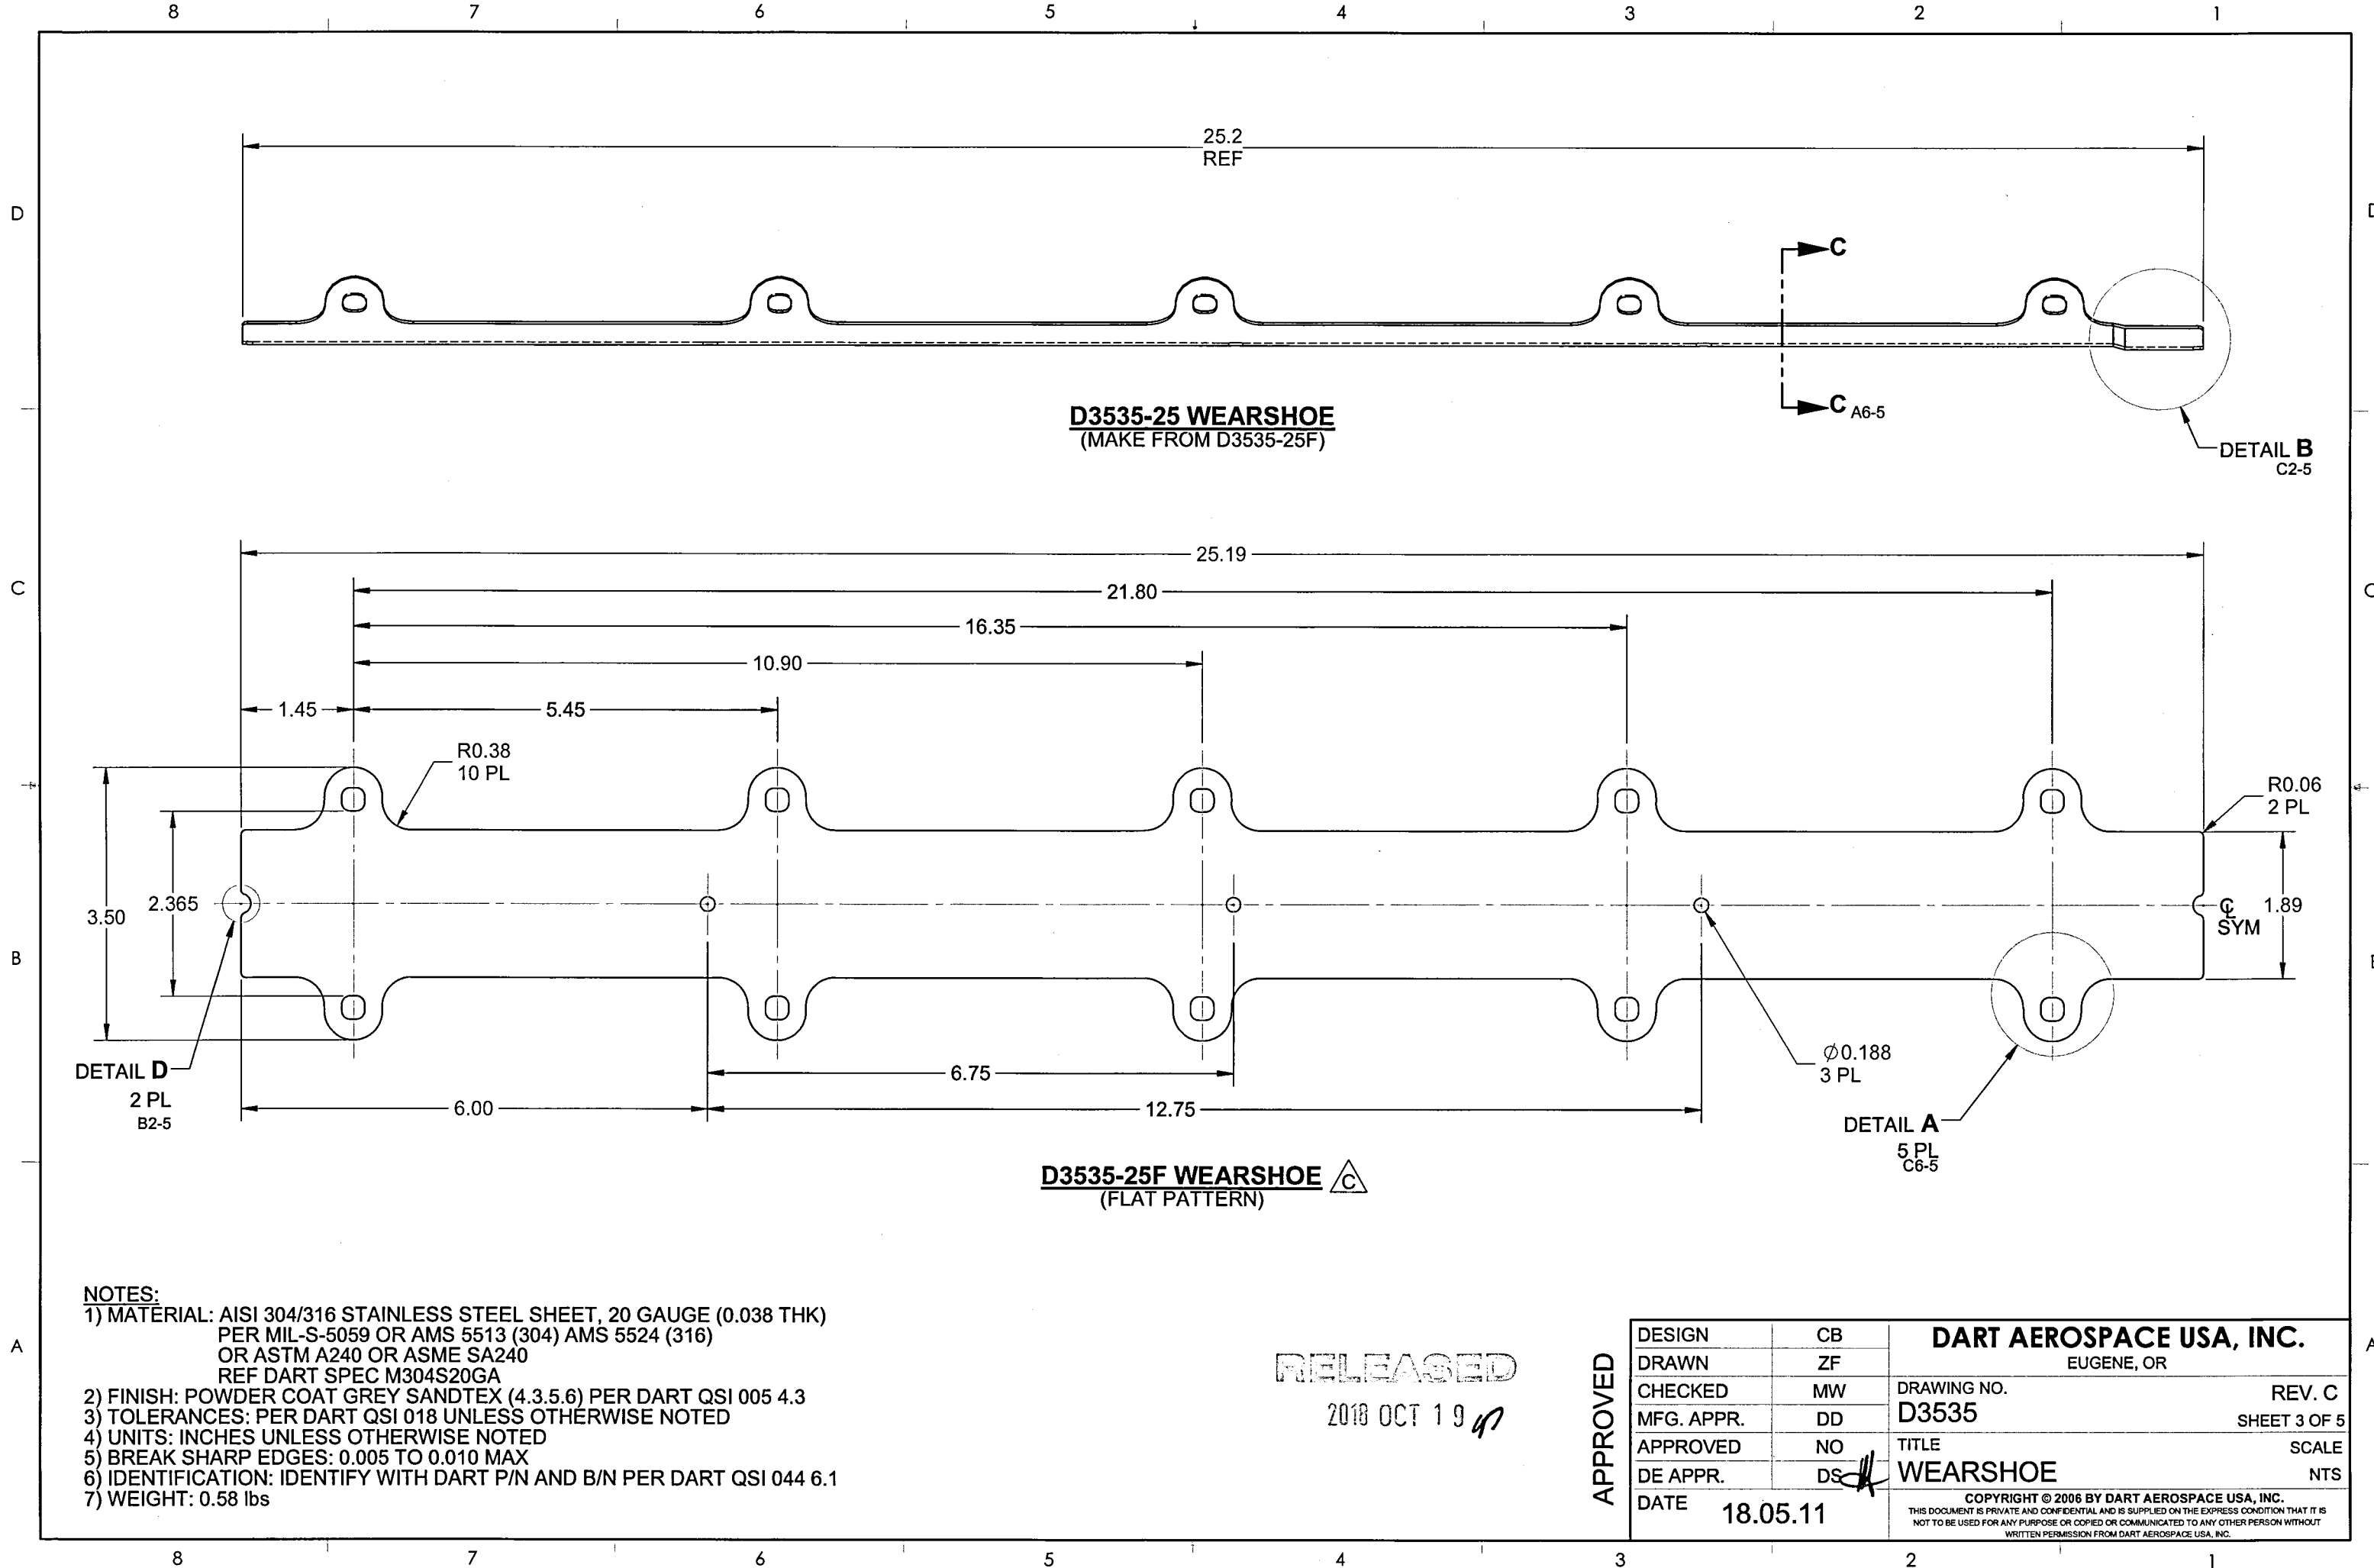

8 7 6 5 4 3 2 1

D


D

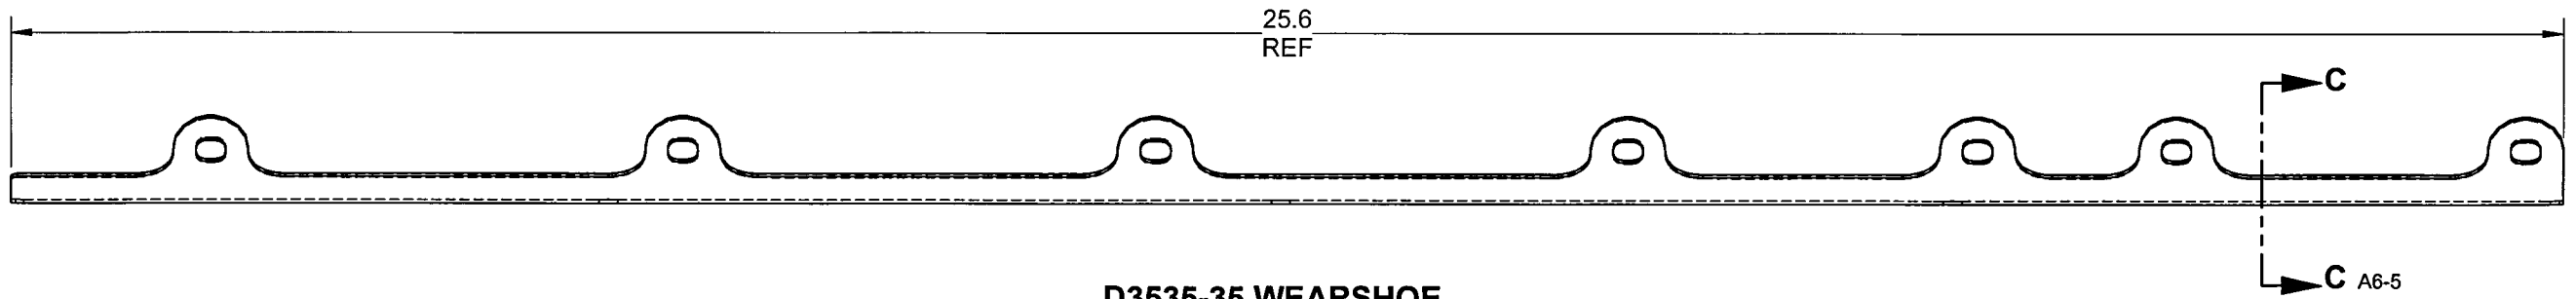

D3535-35 WEARSHOE
(MAKE FROM D3535-35F)

C

C

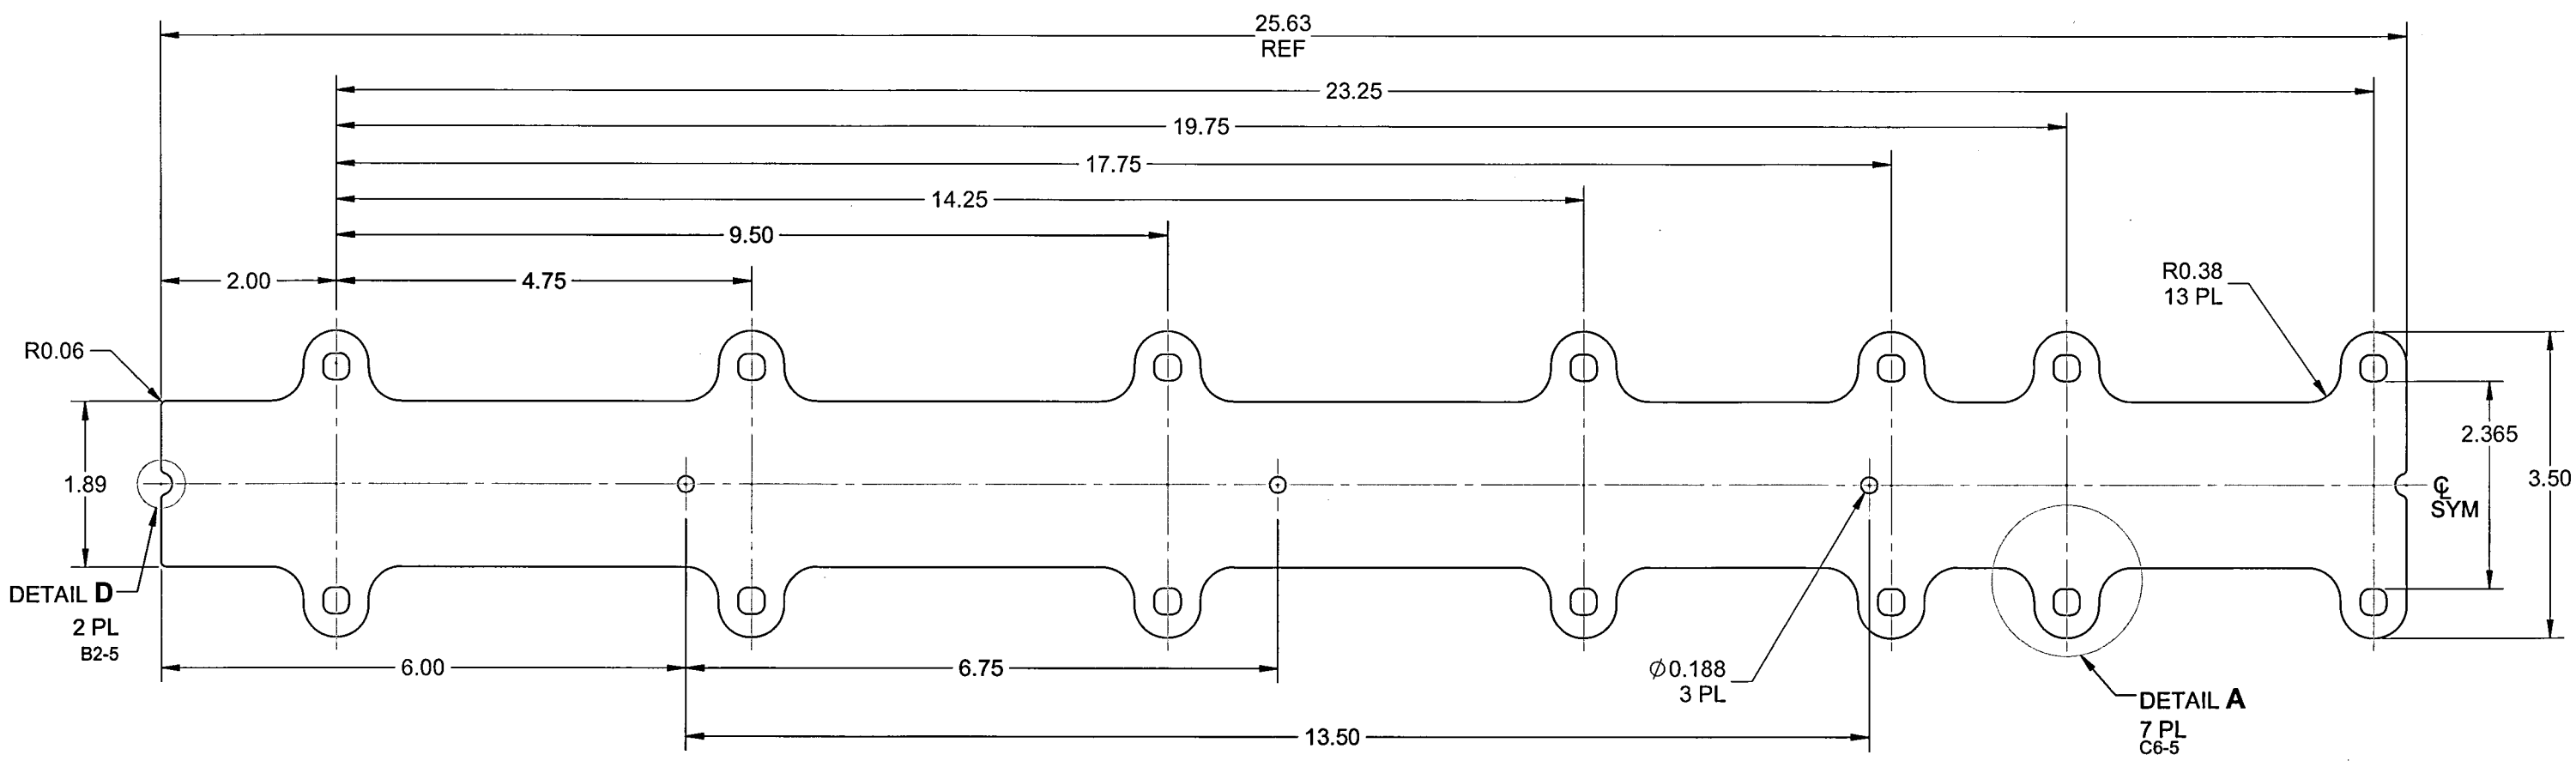

D3535-35F WEARSHOE
(FLAT PATTERN)

- NOTES:**
- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SHEET, 20 GAUGE (0.038 THK)
PER MIL-S-5059 OR AMS 5513 (304) AMS 5524 (316)
OR ASTM A240 OR ASME SA240
REF DART SPEC M304S20GA
 - 2) FINISH: POWDER COAT GREY SANDTEX (4.3.5.6) PER DART QSI 005 4.3
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY WITH DART P/N AND B/N PER DART QSI 044 6.1
 - 7) WEIGHT: 0.61 lbs

RELEASED
2018 OCT 19


APPROVED

DESIGN	CB	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	ZF		
CHECKED	MW	DRAWING NO.	REV. C
MFG. APPR.	DD	D3535	SHEET 4 OF 5
APPROVED	NO	TITLE	SCALE
DE APPR.	DS	WEARSHOE	NTS
DATE	18.05.11	COPYRIGHT © 2006 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	


A

A


8 7 6 5 4 3 2 1

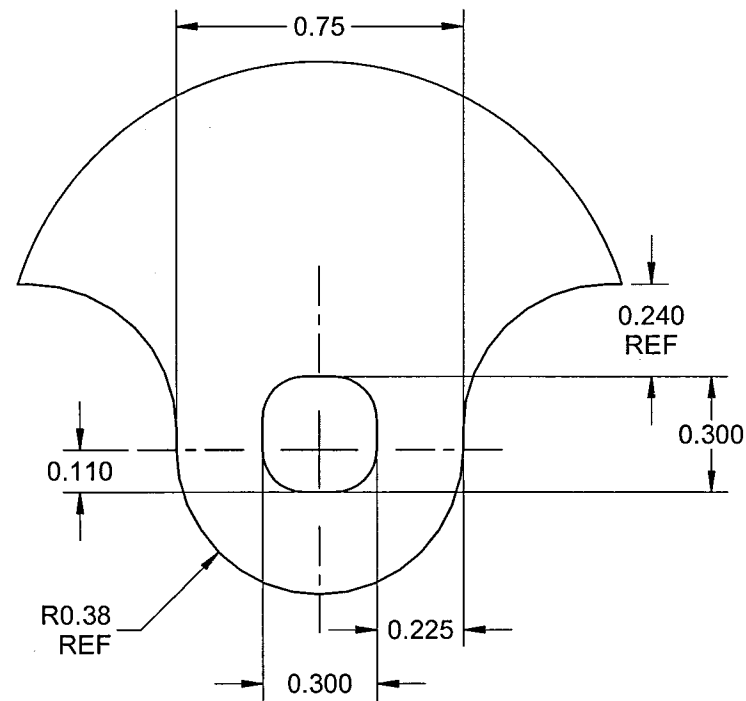


DETAIL A B7-2
A2-2
A2-4

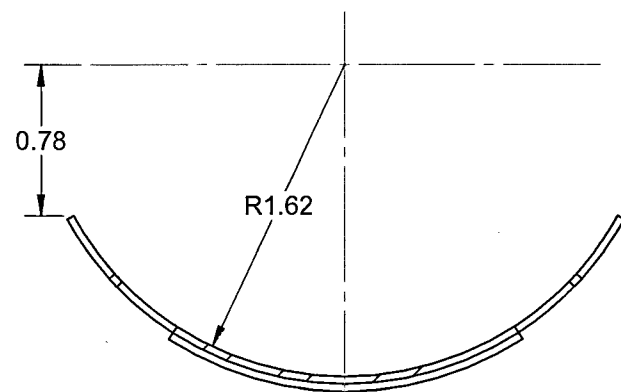

DETAIL C D3-2
C2-3
D2-4

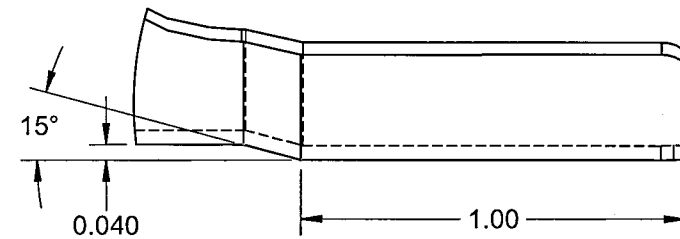

DETAIL B D1-2
C1-3

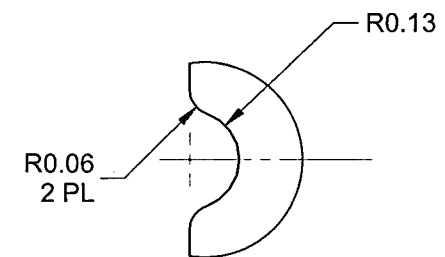

DETAIL D B8-2
B8-3
B8-4

RELEASED

2018 OCT 19

APPROVED

DESIGN	CB	DART AEROSPACE USA, INC.	
DRAWN	ZF	EUGENE, OR	
CHECKED	MW	DRAWING NO.	REV. C
MFG. APPR.	DD	D3535	SHEET 5 OF 5
APPROVED	NO	TITLE	SCALE
DE APPR.	DS	WEARSHOE	NTS
DATE	18.05.11	<small>COPYRIGHT © 2006 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	